



THE EDGE
ON SAFETY



DESCRIPTION

Connect Connexx Maximus Modular Matting System

FEATURES


The maximus inlay consists of 100% PA 6.6, which has the advantage of a very high moisture absorbance.

Connexx has little scraper bars to strip coarse dirt and little gaps to avoid the dirt lying on the top of the mat. The gaps between each inlay are very small which means that a big area of the whole matting area consists of inlay.

Modules can be easily replaced.

MATERIAL

Tile Material:	UV Resistant PVC – 100% soft PVC
Tile Construction:	Tufting-Velours 1/8"
Total thickness:	16mm
Tile Size:	Nominal 250 x 250mm
Total Weight:	1m ² = 11.2kg
Construction:	Cut Pile
Maximus Infill Pile Weight:	1030 g/ m ²
Tiles to Box:	16 tiles per box
Tile to sqm:	16 tiles to sqm
Max Point Load Capacity:	1,000kg/100cm ² (fully supported)
Frequency:	< 10,000 passages per day

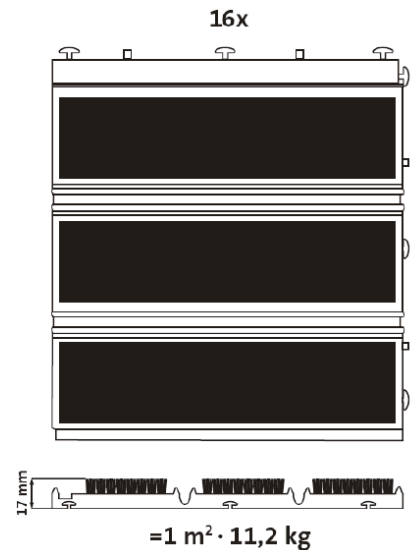

DIMENSIONS

Total thickness:	17mm	Base thickness:	15mm
Tile Size:	Nominal 250 x 250mm		

