Environmental Product Declaration





In accordance ISO14025:2006 and EN15804:2012+A2:2019/AC:2021 for:

Omnisports Heterogeneous vinyl flooring from TARKETT

EPD OF MULTIPLE PRODUCTS BASED ON AVERAGE PRODUCT RESULTS.



Programme: The International EPD® System, <u>www.environdec.com</u>

Programme operator: EPD International AB EPD registration number: EPD-IES-0001507:002

 Version date:
 2025-01-20

 Validity date:
 2030-01-20

An EPD may be updated or depublished if conditions change. To find the latest version of the EPD and to confirm its validity, see www.environdec.com.







General information

Programme information

Programme:	The International EPD® System										
	EPD International AB										
Address:	Box 210 60										
	SE-100 31 Stockholm										
Website:	Sweden										
Website: www.environdec.com E-mail: info@environdec.com											
Accountabilities for PCR, LCA and independent, third-party verification											
Product Category Rules (PC	R)										
CEN standard EN 15804 serve	es as the Core Product Category Rules (PCR)										
Product category rules (PCR laminate floor coverings (EN 1): PCR 2019:14 version 1.3.3 and c-PCR-004 Resilient textile and 6810)										
www.environdec.com for a list	by: The Technical Committee of the International EPD System. See of members. Review chair: Claudia A. Peña, University of Concepción, e contacted via the Secretariat www.environdec.com/contact.										
Life Cycle Assessment (LCA	()										
LCA accountability: Perla Bour	mendil, Tarkett										
Third-party verification											
Independent third-party verification	ation of the declaration and data, according to ISO 14025:2006:										
☐ EPD process certification ▷	EPD verification										
Third party verifier: Anni Oviir,	Rangi Maja OÜ.										
Approved by: The Internationa	I EPD® System										
Procedure for follow-up of data	a during EPD validity involves third party verifier:										
⊠ Yes □ No											

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but registered in different EPD programmes, or not compliant with EN 15804, may not be comparable. For two EPDs to be comparable, they must be based on the same PCR (including the same version number) or be based on fully-aligned PCRs or versions of PCRs; cover products with identical functions, technical performances and use (e.g. identical declared/functional units); have equivalent system boundaries and descriptions of data; apply equivalent data quality requirements, methods of data collection, and allocation methods; apply identical cut-off rules and impact assessment methods (including the same version of characterisation factors); have equivalent content declarations; and be valid at the time of comparison. For further information about comparability, see EN 15804 and ISO 14025.

This EPD is a specific EPD, Cradle-to-grave with module D.





Company information

Owner of the EPD: Tarkett

<u>Contact:</u> Myriam Tryjefaczka , <u>myriam.tryjefaczka@tarkett.com</u> Tarkett La Défense, 1 Terrasse Bellini 92400 Paris

Description of the organisation:

With an international coverage and a wide range of products, Tarkett has over 130 years of experience in providing integrated solutions for floorings to professionals and end users.

Many of the most important architectural firms in the world and building professionals have chosen Tarkett for the value of its products and for its consultation and service abilities. Therefore, Tarkett floorings and sport surfaces are present in several prestigious architectural reference points. Tarkett offers integrated solutions for floorings, able to meet the particular needs of customers. Our wide range of designs, colors and models provides an infinite series of possibilities, contributing to create a positive environment and a better quality of life for people.

Tarkett operates with the utmost respect for the environment towards the realization of eco-friendly products.

Tarkett's commitment to the environment is woven throughout its business. Cradle-to-Cradle principles are, in fact, the basis of the design and production of every solution. Particularly, the lifecycle analysis is used to continuously improve the production process, and so the products until their use stage, disposal and recycling. The commitment to the environment is also proven by the accession to the Circular Economy 100 program, where Tarkett group, with a network of companies, is working to develop a circular economy model based on the reuse of materials and preservation of natural resources. The development of products that can be reused within internal production cycles, or external ones in case of other individuals, has been an integral part of the business strategy aimed at sustainability for many years. The WCM (World Class Manufacturing) management system has been developed in 2009, and it includes the environmental pillar aimed to the elimination of losses and to the growth of process efficiency.

<u>Product-related or management system-related certifications:</u> ISO 9001, ISO 14001, ISO 45001, WCM manufacturing site.

Name and location of production site(s): Sedan (FR)

Product information

<u>Product name:</u> Omnisport Reference Multi-Use, Omnisport Speed, Omnisport Speed Table Tennis, Omnisport Training, Omnisport Dancefloor

<u>Declared Product</u>: Omnisport Reference Multi-Use, results based on average product determination <u>Product identification</u>: Omnisport Reference Multi-Use, Omnisport Speed, Omnisport Speed Table Tennis, Omnisport Training, Omnisport Dancefloor are vinylic flooring stabilized by a glass fibre with Top Clean XP Treatment (EN 14041)

<u>Product description:</u> Omnisports product provides ideal innovative floorings for young athletes and children. For them, performance and pleasure should be their only concern. Omnisports floorings meet the highest environmental and health standards allowing. The service lifetime recommended by Tarkett is 20 years.



Figure 1 –Omnisport Reference Multi-Use flooring illustration



Figure 2 – Omnisport Speed flooring illustration








Figure 3 – Omnisport Speed Table Tennis flooring illustration illustration.



Figure 4 – Omnisport Training flooring



Figure 5 – Omnisport Dancefloor flooring illustration

Geography: European technology and process coverage.

UN CPC code: APE/NAF - 2223Z

LCA information

<u>Functional unit / declared unit:</u> 1m² of floor covering with a reference service life (RSL) of 1 year for specified characteristics application and use areas according to EN 13845 and EN ISO 10874. <u>Reference service life:</u> 1 year.

Time representativeness: 2023.

Database(s) and LCA software used: Ecoinvent 3.9, Simapro 9.5

Description of system boundaries: Cradle-to-grave with module D

<u>Cut-off criteria</u>: The cut-off criteria used for this study follow the guidelines set out in the PCR which conform to the EN 15804-A2, as following:

- All inputs and outputs to a (unit) process are included in the calculation where the data is available.
- A maximum of 1% of the total mass per unit process may be omitted.
- A maximum of 1% of the total renewable and non-renewable energy for a unit process may be omitted.
- A maximum of 5% of the total energy usage and mass per module may be omitted.

 All input and output flows have been considered, including raw materials as per the product composition provided by the manufacturer and packaging of raw materials as well as the final product.

Energy and water consumptions have also been considered at 100% according to the data provided.


Mass balance approaches (MBAs), to claim, for example, biobased, renewable, and/or recycled product content, are not applied.

EN 15804 reference package" based on EF 3.1 has been used.





System diagram:

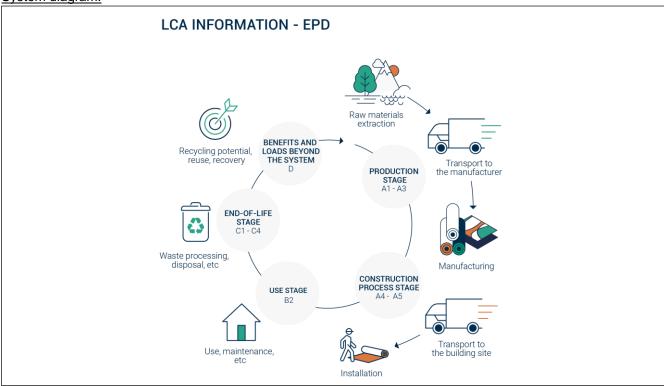

More information: The product is classified in accordance with EN 13845 and in reference to the FCSS (Floor Covering Standard Symbols) to be installed in various areas of application, such as: healthcare, education, commercial, education. The area of use according to the ISO 10874 is very heavy (34) for commercial classification and heavy (43) for industrial classification





Modules declared, geographical scope, share of specific data (in GWP-GHG indicator) and data variation:

	Pro	duct st	age	prod	ruction cess ige		Use stage								End of life stage				
	Raw material supply	Transport	Manufacturing	Transport	Construction installation	Use	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	De-construction demolition	Transport	Waste processing	Disposal	Reuse-Recovery-Recycling- potential		
Module	A 1	A2	А3	A4	A5	В1	B2	В3	В4	В5	В6	В7	C1	C2	C3	C4	D		
Modules declared	Х	Х	Х	Х	Х	Х	Х	×	Х	Х	Х	Х	х	Х	Х	Х	Х		
Geography	EU	EU	EU	EU	EU	EU	EU	EU	EU	EU	EU	EU	EU	EU	EU	EU	EU		
Specific data used	20%	50%	100%	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
Variation – products		1%		-	-	-	-	-	-	-	-	-	-	-	-	-	-		
Variation – sites	0%	0%	0%	-	-	-	-	-	-	-	-	-	-	-	-	-	-		





Content information

Product	Thickness(mm)	Weight (kg/m²)	Recycled Content
Omnisport Reference Multi- Use	6.20E+00	3.95E+00	21%
Omnisport Speed	3.45E+00	3.04E+00	25%
Omnisport Speed Table Tennis	3.45E+00	3.04E+00	25%
Omnisport Training	5.00E+00	3.60E+00	22%
Omnisport Dancefloor	3.45E+00	3.04E+00	25%
Declared Product (Reference Multi-Use)	6.20E+00	3.95E+00	21%

According to PCR 2019:14 v1.3.3, several sets of results, reflecting different products, are not allowed to be declared in the same EPD. However, similar products from a single or several manufacturing sites covered by the same PCR and manufactured by the same company with the same major steps in the core processes may be grouped and thereby included in the same EPD;

The results of a worst-case product (Reference Multi-Use) will be declared in this EPD.

The variation in GWP-GHG results for modules A1-C4 between included products and the declared product goes from 13 – 30%.

The components for Reference Multi-Use are detailed here:

	Refe	rence Multi-Use					
Product components	Weight, kg/m²	Post-consumer material, weight-%	Biogenic material, weight-% and kg C/kg				
PVC	1.66E00	0%	0%				
Plasticizer	7.76E-01	0%	0%				
Epoxidized soya bean oil	1.76E-02	0%	83% 0.051				
Mineral Fillers	3.59E-01	0%	0%				
Stabilizers	1.76E-02	0%	0%				
Glass veil	3.73E-02	0%	0%				
Additives	5.75E-02	0%	0%				
Pigments	3.13E-02	0%	0%				
Surface Treatment	4.55E-02	0%	0%				
Calendered Underlay	1.00E+00	<1%	0%				
TOTAL	3.95E+00	<0.3%	1.8%				
Packaging materials	Weight, kg/m²	Weight-% (versus the product)	Weight biogenic carbon, kg C/kg				
Product Packaging Cardboard	1.64E-02	0,42%	0.012				






Product Packaging Disc	8.87E-03	0,04%	-
Product Packaging Paper (Foil)	1.70E-03	0,22%	-
Product Packaging Plug	1.70E-3	0,04%	
TOTAL	2.87E-02	0.73%	0.012

The Calendered underlay is primarily made out of post-industrial recycled material and also contains post-consumer material as part of the Restart program.

Product manufacturing

Production process

The following figures show the production process of heterogeneous flooring:

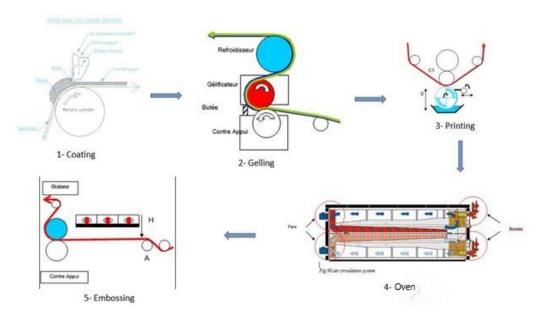

Production waste

Waste type	Amount	Unit
Non-hazardous waste to external recycling	3.57E-01	kg/m²
Hazardous waste to external treatment	3.34E-03	kg/m²

NB: Post manufacturing recycling concerns the recycling of the losses inside the plant production. Therefore, there is no end-of-life impact on losses (except the recycling preparation).

Electricity GWP-GHG

Plant	Ecoinvent Module	KgCO2eq/kWh
Sedan	Electricity, medium voltage {FR} electricity, medium voltage, residual mix Cut-off, U	8,20E-02





Health, safety and environmental aspects during production

Omnisport production site complies with the ISO 14001 Environmental Management System, ISO 45001 Occupational health and safety management systems, and the ISO 9001 Quality Management System.

Delivery and installation

Delivery

The average distribution distance between the factory and the installation site is 958km. It has been calculated considering the average distance between European countries where Tarkett is selling the Omnisport Multi-Use products and the factory plant in Sedan (France). The distribution is made by truck.

Installation

The different parts of the flooring are cut to fit the surface to be covered and they are arranged together so that they can fit perfectly between them on the floor .The different parts of the flooring are installed with a GreenLay method, with epoxy adhesive and acrylic tape, and welded together.

Description	Amount	Unit
Electricity consumption	4.00E-02	kWh/m²
Acrylic tape	2.00E-02	kg/m²
Epoxy adhesive	2.50E-03	kg/m²

Waste

During the installation approximately 3% of the flooring is lost as off-cuts. All flooring losses are sent to recycling. Thanks to the ReStart program. Tarkett offers to all of its customer flooring installers a free take-back system for installation off-cuts including equipment, logistics and recycling. This analysis therefore considers a recycling scenario of the offcut.

Packaging

50 % of the packaging materials goes to incineration and 50 % goes to landfill.

Use Stage

Reference Service Life (RSL)





For this product, the stated RSL is 1 year. It should be noted, however, that the service life of a Heteregenous polyvinylchloride floor covering may vary depending on the amount and nature of floor traffic and the type and frequency of maintenance. The manufacturer has provided this service life on the basis of his experience of flooring manufacture and supply. This RSL is applicable as long as the product use complies with that defined by ISO 14041 and ISO10874 in accordance with the product's classification. The service lifetime recommended by Tarkett is 20 years.

Cleaning and maintenance

Cleaning regime is based on traditional cleaning protocol integrating manual and mechanical operations. Depending on premises considered, these consumptions may vary. The considered regime fits high traffic areas. The maintenance scenario is:

Daily maintenance : once a day

Common maintenance : once a week

Description	Amount	Unit
Electricity consumption	1.33E-01	kWh/year/m ²
Water consumption	1.00E+01	L/year/m ²
Detergent consumption	1.00E-01	L/year/m ²

Prevention of structural damage

To avoid excessive wear, usage should be restricted to the stated areas of application as outlined by Tarkett in accordance with ISO 10874.





End of Life

3 distinct End-of-Life scenarios have been modeled for Omnisport Reference Multi-Use products. Tarkett recommend using the ReStart program at End-of-Use to recycle the product. However, to showcase the value of Tarkett's recycling activities, environmental impacts of two alternative scenarios have been calculated.

Recycling /R

100% of the Omnisport Reference Multi-Use products can be recycled at its end of use stage, thanks to the ReStart® program and the GreenLay installation method, enabling Tarkett to collect installation losses and post-use flooring from construction sites to recycle it and/or re-use it as high-quality raw material back in Tarkett plants. Tarkett has developed a new technology that cleans, shreds, and recycles previously unusable post-consumer vinyl. Thus, Omnisport Reference Multi-Use are recycled at another Tarkett plant in Clervaux, Luxemburg. The transport between construction site and recycling facility is 1488 km by truck. Environmental impacts of recycling are presented in module **C/R**.

Incineration with energy recovery /I

Incineration with energy recovery is a rising waste management method in many of the countries in which Omnisport Reference Multi-Use is sold. While Tarkett wishes to recycle 100% of sold Omnisport Reference Multi-Use, incineration with energy recovery is an alternative option if recycling is impossible. Environmental impacts of incineration with energy recovery are presented as additional information in module C/I.

Landfilling /L

Landfilling waste is still a prominent waste management scenario. This option is however not recommended by Tarkett. Environmental impacts of landfilling are presented as additional information in module C/L.

Benefits and loads beyond system boundary

Recycling /R

The benefit is due to the recycling post-use flooring that allows avoiding the emissions of virgin materials. Omnisport Reference Multi-Use products can be 100% recycled at post-installation and post-consumer stage. Post-consumer recycling process currently has an efficiency of 90%. Benefits from avoided raw material production and avoided transport are calculated in module **D/R**.

Landfilling /L

Benefits accounted in this scenario exclusively come from installation offcuts recycling and are presented as additional information in module D/L.

Incineration with energy recovery /I

Benefits from installation offcuts recycling and incineration energy recovery are calculated as additional information in module D/I.



Results

The estimated impact results are only relative statements, which do not indicate the endpoints of the impact categories, exceeding threshold values, safety margins and/or risks.

Disclaimer: The results of modules A1-A3 should not be used without considering the results of module C.





Environmental Information

Potential environmental impact

		Results	per fund	tional o	r declare	d unit ir	case of	Recycli	ing – Om	nisport	Referen	ce Multi-	Use			
Indicator	Unit	A1-A3	A4	A5	B1	B2	В3	B4	B5	B6	B7	C1/R	C2/R	C3/R	C4/R	D/R
GWP-total	kg CO₂ eq.	8,48E+00	7,15E-01	4,05E-01	0,00E+00	1,65E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	7,73E-01	9,95E-01	5,35E-02	-3,85E+00
GWP-fossil	kg CO₂ eq.	8,37E+00	7,14E-01	3,39E-01	0,00E+00	1,56E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	7,72E-01	9,65E-01	5,35E-02	-3,87E+00
GWP- biogenic	kg CO₂ eq.	6,91E-02	2,28E-04	6,47E-02	0,00E+00	1,25E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,46E-04	2,98E-02	3,51E-06	4,81E-02
GWP- Luluc	kg CO₂ eq.	3,47E-02	3,51E-04	1,13E-03	0,00E+00	8,22E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,78E-04	1,49E-04	4,15E-07	-2,43E-02
ODP	kg CFC 11 eq.	5,62E-06	1,56E-08	1,72E-07	0,00E+00	5,01E-09	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,68E-08	4,22E-08	5,50E-11	-3,94E-06
AP	mol H⁺ eq.	4,77E-02	2,30E-03	1,78E-03	0,00E+00	9,76E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,52E-03	8,09E-04	1,22E-05	-2,91E-02
EP-freshwater	kg P eq	2,21E-03	5,02E-05	9,31E-05	0,00E+00	8,68E-05	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	5,40E-05	3,55E-05	1,60E-07	-1,47E-03
EP-freshwater	kg PO4 eq	6,78E-03	1,54E-04	2,86E-04	0,00E+00	2,66E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,66E-04	1,09E-04	4,91E-07	-4,50E-03
EP-marine	kg N eq.	1,56E-02	7,86E-04	6,09E-04	0,00E+00	4,65E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	8,66E-04	2,49E-04	6,97E-06	-7,53E-03
EP-terrestrial	mol N eq.	8,00E-02	8,29E-03	3,22E-03	0,00E+00	2,19E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	9,15E-03	2,67E-03	5,94E-05	-3,05E-02
POCP	kg NMVOC eq.	4,15E-02	3,44E-03	1,59E-03	0,00E+00	5,87E-04	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,76E-03	1,70E-03	1,49E-05	-1,86E-02
ADP-minerals&metals*	kg Sb eq.	1,07E-04	2,36E-06	3,69E-06	0,00E+00	1,24E-06	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,54E-06	1,02E-06	3,66E-09	-7,32E-05
ADP-fossil*	MJ	2,22E+02	1,01E+01	8,10E+00	0,00E+00	3,27E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,09E+01	1,38E+01	9,87E-03	-1,14E+02
WDP	m³	1,16E+01	4,20E-02	3,85E-01	0,00E+00	2,38E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	4,52E-02	2,37E-02	2,43E-03	-8,05E+00

Acronyms

GWP-fossil = Global Warming Potential fossil fuels; GWP-biogenic = Global Warming Potential biogenic; GWP-luluc = Global Warming Potential land use and land use change; ODP = Depletion potential of the stratospheric ozone layer; AP = Acidification potential, Accumulated Exceedance; EP-freshwater = Eutrophication potential, fraction of nutrients reaching marine end compartment; EP-marine = Eutrophication potential, Accumulated Exceedance; POCP = Formation potential of tropospheric ozone; ADP-minerals&metals = Abiotic depletion potential for non-fossil resources; ADP-fossil = Abiotic depletion for fossil resources potential; WDP = Water (user) deprivation potential, deprivation-weighted water consumption

^{*} Disclaimer: The results of this environmental impact indicator shall be used with care as the uncertainties of these results are high or as there is limited experience with the indicator.





Environmental Information

Potential environmental impact

			Re	sults per	functiona	ıl or decla	red unit i	n case of	Recycling	g – Omnis	port Refe	erence Mu	Iti-Use			
Indicator	Unit	A1-A3	A4	A5	B1	B2	В3	В4	В5	В6	В7	C1/R	C2/R	C3/R	C4/R	D/R
PERE	MJ	2,69E+01	1,58E-01	9,43E-01	0,00E+00	7,16E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,70E-01	4,78E+00	4,05E-04	-1,39E+01
PERM	MJ	4,67E-01	0,00E+00	1,40E-02	0,00E+00	1,50E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	-1,30E-01	0,00E+00	-9,29E-02
PERT	MJ	2,74E+01	1,58E-01	9,57E-01	0,00E+00	8,66E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,70E-01	4,65E+00	4,05E-04	-1,39E+01
PENRE	MJ	2,23E+02	1,01E+01	8,13E+00	0,00E+00	2,43E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,09E+01	1,38E+01	9,87E-03	-1,15E+02
PENRM	MJ.	1,46E-01	0,00E+00	4,37E-03	0,00E+00	8,42E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
PENRT	MJ	2,23E+02	1,01E+01	8,14E+00	0,00E+00	3,28E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,09E+01	1,38E+01	9,87E-03	-1,15E+02
SM	kg	7,60E-01	0,00E+00	2,28E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,01E+00
RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
FW	m³	2,17E-01	1,45E-03	7,30E-03	0,00E+00	-2,97E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,56E-03	9,22E-04	7,67E-05	-1,46E-01

Acronyms

PERE = Use of renewable primary energy excluding renewable primary energy resources used as raw materials; PERM = Use of renewable primary energy resources used as raw materials; PERT = Total use of renewable primary energy resources; PENRE = Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw materials; PENRM = Use of non-renewable primary energy re-sources; SM = Use of secondary material; RSF = Use of renewable secondary fuels; NRSF = Use of non-renewable secondary fuels; FW = Use of net fresh water





Waste production and output flows

Waste production

			Results	s per fund	ctional or	declared	unit in ca	se of Red	ycling – (Omnispor	t Referen	ce Multi-	Use			
Indicator	Unit	A1-A3	A4	A5	B1	B2	В3	В4	В5	В6	В7	C1/R	C2/R	C3/R	C4/R	D/R
Hazardous waste disposed	kg	3,88E-01	9,68E-03	1,42E-02	0,00E+00	6,41E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,04E-02	6,74E-03	1,28E-03	-2,26E-01
Non-hazardous waste disposed	kg	3,56E+00	5,78E-01	1,82E-01	0,00E+00	7,25E-02	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	6,22E-01	7,12E-02	4,93E-04	-2,22E+00
Radioactive waste disposed	kg	5,71E-04	3,30E-06	1,93E-05	0,00E+00	1,03E-05	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,56E-06	3,73E-06	5,01E-09	-1,80E-04

Output flows

			Result	s per fun	ctional or	declared	unit in ca	se of Rec	ycling – C	Omnisport	Reference	e Multi-U	se			
Indicator	Unit	A1-A3	A4	A5	B1	B2	В3	B4	B5	B6	B7	C1/R	C2/R	C3/R	C4/R	D/R
Components for reuse	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Material for recycling	kg	9,69E-01	0,00E+00	1,72E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	3,56E+00	0,00E+00	0,00E+00
Materials for energy recovery	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Exported energy, electricity	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	1,58E-01	0,00E+00
Exported energy, thermal	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

Additional indicator

	Results per functional or declared unit in case of Recycling – Omnisport Reference Multi-Use															
Indicator	Unit	A1-A3	A4	A5	B1	B2	В3	B4	B5	В6	B7	C1/1	C1/R	C2/R	C3/R	C4/R
GWP- fossil	kg CO ₂ eq.	8,41E+00	7,14E-01	3,41E-01	0,00E+00	1,64E-01	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	7,73E-01	9,65E-01	5,35E-02	-3,89E+00

¹ GWP-GHG is the sum of GWP-Fossil and GWP-LULUC indicators





Additional information – Potential impacts and flows in case of incineration.

Results per functional or declared unit in case of incineration - Omnisport Reference Multi-U								
Indicator	Unit	C1/I	C2/I	C3/I	C4/I	D/I		
GWP-total	kg CO ₂ eq.	0,00E+00	8,01E-02	0,00E+00	8,08E+00	-5,95E+00		
GWP-fossil	kg CO ₂ eq.	0,00E+00	8,00E-02	0,00E+00	8,04E+00	-5,94E+00		
GWP- biogenic	kg CO ₂ eq.	0,00E+00	2,54E-05	0,00E+00	3,47E-02	-6,56E-03		
GWP- Luluc	kg CO ₂ eq.	0,00E+00	3,92E-05	0,00E+00	4,11E-03	-7,03E-03		
ODP	kg CFC 11 eq.	0,00E+00	1,74E-09	0,00E+00	1,22E-06	-7,35E-07		
AP	mol H+ eq.	0,00E+00	2,61E-04	0,00E+00	1,40E-02	-2,26E-02		
EP-freshwater	kg P eq	0,00E+00	5,60E-06	0,00E+00	1,02E-03	-2,02E-03		
EP-freshwater	kg PO ₄ 3- eq	0,00E+00	3,92E-07	3,92E-07 0,00E+00		-1,42E-04		
EP-marine	kg N eq.	0,00E+00	8,97E-05	0,00E+00	3,29E-03	-4,13E-03		
EP-terrestrial	mol N eq.	0,00E+00	9,48E-04	0,00E+00	3,35E-02	-3,55E-02		
POCP	kg NMVOC eq.	0,00E+00	3,90E-04	0,00E+00	9,93E-03	-1,49E-02		
ADP-minerals&metals*	kg Sb eq.	0,00E+00	2,63E-07	0,00E+00	4,64E-05	-1,49E-05		
ADP-fossil*	MJ	0,00E+00	1,13E+00	0,00E+00	2,98E+01	-9,87E+01		
WDP	m³	0,00E+00	4,69E-03	0,00E+00	3,50E+00	-1,44E+00		
Results per function	al or declare	d unit in cas	e of inci	neration -	Omnisport	Reference Multi-Use		
Indicator	Unit	C1/I	C2/I	C3/I	C4/I	D/I		
PERE	MJ	0,00E+00	1,76E-02	0,00E+00	3,59E+00	-8,41E+00		
PERM	MJ	0,00E+00	0,00E+00	0,00E+00	-1,30E-01	-1,17E-02		
PERT	MJ	0,00E+00	1,76E-02	0,00E+00	3,46E+00	-8,42E+00		
PENRE	MJ	0,00E+00	1,13E+00	0,00E+00	2,98E+01	-9,88E+01		
PENRM	MJ.	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00		
PENRT	MJ	0,00E+00	1,13E+00	0,00E+00	2,98E+01	-9,88E+01		
SM	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	2,87E-01		
RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00		
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00		
FW	m³	0,00E+00	1,61E-04	0,00E+00	9,91E-02	-4,79E-02		
Results per function	al or declare	d unit in cas	e of inci	neration -	Omnisport	Reference Multi-Use		
Indicator	Unit	C1/I	C2/I	C3/I	C4/I	D/I		
Hazardous waste disposed	kg	0,00E+00	1,08E-03	0,00E+00	7,14E-01	-8,84E-02		
Non-hazardous waste disposed	kg	0,00E+00	6,44E-02	0,00E+00	2,26E+00	-1,08E+00		
Radioactive waste disposed	kg	0,00E+00	3,69E-07	0,00E+00	8,02E-05	-2,59E-04		
Results per functional or declared unit in case of incineration – Omnisport Reference Mo								
Indicator	Unit	C1/I	C2/I	C3/I	C4/I	D/I		
Components for re-use	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00		
Material for recycling	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00		
Materials for energy recovery	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00		
Exported energy. electricity	MJ	0,00E+00	0,00E+00	0,00E+00	6,75E+01	0,00E+00		
Exported energy. thermal	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00		





Additional information – Potential impacts and flows in case of landfilling.

Results per functional or declared unit in case of landfilling – Omnisport Reference Multi-Use									
Indicator	Unit	C1/L	C2/L	C3/L	C4/L	D/L			
GWP-total	kg CO ₂ eq.	0,00E+00	2,40E-02	0,00E+00	3,15E-01	-1,79E-01			
GWP-Fossil	kg CO ₂ eq.	0,00E+00	2,40E-02	0,00E+00	2,86E-01	-1,78E-01			
GWP- biogenic	kg CO₂ eq.	0,00E+00	7,63E-06	0,00E+00	2,96E-02	7,97E-04			
GWP- Luluc	kg CO₂ eq.	0,00E+00	1,17E-05	0,00E+00	9,19E-06	-9,20E-04			
AP	mol H⁺ eq.	0,00E+00	5,22E-10	0,00E+00	1,17E-09	-1,50E-07			
ODP	kgCFC11 eq	0,00E+00	7,83E-05	0,00E+00	2,66E-04	-1,12E-03			
EP-freshwater	kg P eq	0,00E+00	1,68E-06	0,00E+00	2,74E-06	-5,65E-05			
EP-marine	kg N eq.	0,00E+00							
EP-terrestrial	mol N eq.	0,00E+00	2,69E-05	0,00E+00	1,56E-03	-2,92E-04			
POCP	kg NMVOC eq.	0,00E+00	2,84E-04	0,00E+00	1,18E-03	-1,24E-03			
ADP-minerals&metals*	kg Sb eq.	0,00E+00	1,17E-04	0,00E+00	5,13E-04	-7,58E-04			
ADP-Fossil*	MJ	0,00E+00	7,90E-08	0,00E+00	8,21E-08	-2,79E-06			
WDP	m ³	0,00E+00	3,40E-01	0,00E+00	9,25E-01	-4,76E+00			
Results per	Results per functional or declared unit in case of landfilling – Omnisport Reference Multi-Use								
Indicator	Unit	C1/L	C2/L	C3/L	C4/L	D/L			
PERE	MJ	0,00E+00	5,28E-03	0,00E+00	3,94E-02	-6,84E-01			
PERM	MJ	0,00E+00	0,00E+00	0,00E+00	-1,30E-01	-3,50E-03			
PERT	MJ	0,00E+00	5,28E-03	0,00E+00	-9,06E-02	-6,87E-01			
PENRE	MJ	0,00E+00	3,40E-01	0,00E+00	9,25E-01	-4,79E+00			
PENRM	MJ.	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00			
PENRT	MJ	0,00E+00	3,40E-01	0,00E+00	9,25E-01	-4,79E+00			
SM	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	8,61E-02			
RSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00			
NRSF	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00			
FW	m³	0,00E+00	4,84E-05	0,00E+00	1,13E-03	-5,52E-03			
					nisport Reference N				
Indicator	Unit	C1/L	C2/L	C3/L	C4/L	D/L			
Hazardous waste disposed	kg	0,00E+00	3,24E-04	0,00E+00	1,07E-03	-8,74E-03			
Non-hazardous waste disposed		0,00E+00	1,93E-02	0,00E+00	3,99E+00	-8,59E-02			
Radioactive waste disposed	kg	0,00E+00	1,11E-07	0,00E+00	5,17E-07	-6,92E-06			
Results per functional or declared unit in case of landfilling – Omnisport Reference Multi-Use									
Indicator	Unit	C1/L	C2/L	C3/L	C4/L	D/L			
Components for re-use Material for recycling	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00			
Materials for energy recovery	kg kg	0,00E+00 0,00E+00	0,00E+00 0,00E+00	0,00E+00 0,00E+00	0,00E+00 0,00E+00	0,00E+00 0,00E+00			
Exported energy	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00			
Exported energy	IVIJ	U,UUE+UU	U,UUE+UU	U,UUE+UU	U,UUE+UU	0,00E+00			





Variability of LCA results

The declared environmental impacts are the impacts of the worst-case product. The data was collected for the two sites of production. The variability of the results was calculated by doing a sensitivity analysis as recommended by the EN15804+A2/CN.

Variation of environmental impacts for all indicators greater than 10% for A1-C modules

Impact category	min	max
Climate change - total	13%	29%
Climate change - fossil	13%	30%
Climate change - land use and change	25%	27%
GHG-GWP	13%	30%
Ozone depletion	15%	47%
Acidification	11%	29%
Eutrophication, freshwater	12%	31%
Eutrophication, marine	8%	25%
Eutrophication, terrestrial	4%	19%
Photochemical ozone formation	8%	22%
Resource use, minerals and metals	13%	31%
Resource use, fossils	10%	28%
Water use	12%	40%
Renewable primary energy excl. RM	9%	33%
Total renewable primary energy	9%	33%
Non renewable primary energy excl. RM	10%	29%
Total non renewable primary energy	10%	29%
Use of secondary material	24%	24%
Net use of fresh water	12%	40%
Hazardous waste disposed	13%	32%
Non hazardous waste disposed	8%	25%
Radioactive waste disposed	6%	18%
Materials for recycling	7%	19%
Exported energy - electricity	93%	100%





References

General Programme Instructions of the International EPD® System. Version 4.0.

PCR 2019:14. Version 1.3.3 and c-PCR-004 Resilient textile and laminate floor coverings (EN 16810)

Abbreviations

ISO: International Organization for Standardization

EN: European Norms

GWP - GHG: Global Warming Potential - Greenhouse Gas

MND: Module Not Declared

EU: European Union

PCR: Product Category Rules

EPD: Environmenal product declaration

FR: France (ISO 3166 code)

