


EcoLogix® Tile

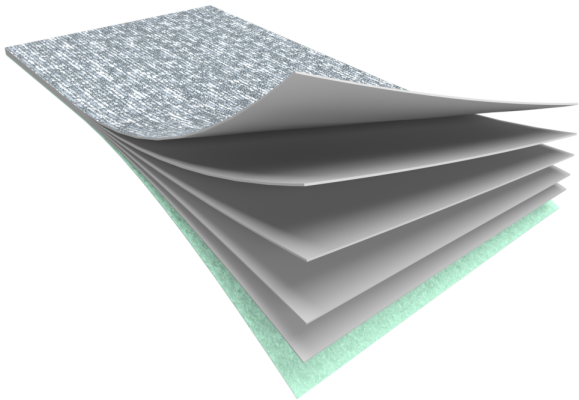

- 1. High performance precoat for maximum tuft bind.
- 2. Thermoplastic laminate for superior delamination strength.
- 3. Fiberglass reinforcement for unmatched stability.
- 4. Thermoplastic laminate.
- 5. Attached post-consumer recycled fiber matrix pad for comfort under foot
- 6. Die-cut into carpet tile.

features / benefits	Performance precoat, fiberglass reinforced thermoplastic layer laminated with a recycled fiber matrix pad containing 100% post-consumer material offering sound insulating properties.
primary	Synthetic
stabilizer	Fiberglass
pad weight	20 oz/sy
backing thickness	0.185 inch
dimensions	24" x 24" (standard); optional sizes available
pad density	8.5 – 9.5 lbs. per cubic foot
testing	Impact Insulation Class (IIC) rating (ASTM E492-09/E989-06) When paired with the appropriate EcoLogix products, results typically range from 54 –78, depending on subfloor assembly and EcoLogix products. For specific results, please contact your account manager.
environmental	See specific product specifications for environmental information / certifications.
installation	Full Spread 3000,5000,4252
warranty	Carpet Tile Lifetime Commercial Limited Warranty for EcoLogix Carpet Tile Lifetime Commercial Limited Warranty for EcoLogix with Stain and Color