


Ecoworx® Tile



- 1 .High performance precoat for maximum tuft bind. Ensuring that all tufts stay in place.
- 2. Thermoplastic laminate for superior delamination strength.
- 3. Fiberglass reinforcement for unmatched stability.
- 4. Thermoplastic laminate.
- 5. Die-cut into carpet tile.

features / benefits	100% PVC-free recyclable backing system, containing post industrial recycled content. Made from a thermoplastic polyolefin compound with a high performance precoat and reinforcing layer. Dimensional Stability with 40% less weight than PVC Superior delamination and edge ravel strength Lower VOC's and smoke density test results than PVC
primary stabilizer	Synthetic Fiberglass
backing thickness	0.135 inch
dimensions	24" x 24" (standard); optional sizes available
testing	Impact Insulation Class (IIC) rating (ASTM E492-09/E989-06) When paired with the appropriate EcoWorx products, results typically range from 53 –75, depending on subfloor assembly and EcoWorx products. For specific results, please contact your account manager.
environmental	See specific product specifications for environmental information / certifications.
installation	Full Spread 3000,5000,4151, Advantage System,LokDots, LokWorx Tabs
warranty	Carpet Tile Lifetime Commercial Limited Warranty for EcoWorx Carpet Tile Lifetime Commercial Limited Warranty for EcoWorx with Stain and Color

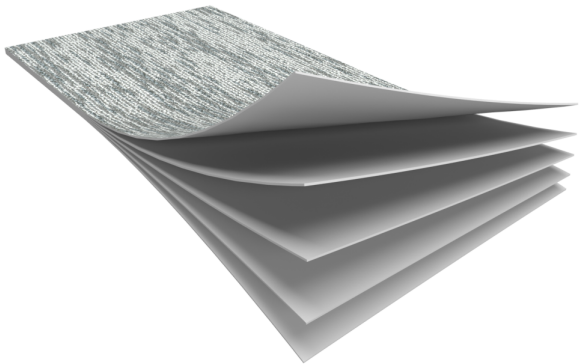