


## JACOBSEN BRINGS YOU

Everlast  
Laminate

Suitable for residential and commercial applications such as:

- > Workplace
- > Living Rooms
- > Rumpus
- > Retail
- > Entrance
- > Kitchen
- > Aged Care
- > Bedroom
- > Bathrooms

### 8 mm Range (193Wx1213L x 8 mm)




2799  
European Oak




2801  
Grey Oak




2803  
Smoked Oak



2856  
Eden Oak



2859  
Rich American Oak



2807  
Antique Oak




2860  
Grey Limed Oak



2865  
Burnt Oak

### 10 mm Range (235Wx1525L x10 mm)



3562  
Winter Oak



3565  
American Oak



3563  
Honey Oak



3564  
Victorian Oak



3566  
Helena Bay



3561  
Copper Oak



3560  
Shadow Oak

The information given here is correct at the date of publication however due to ongoing product improvement, Jacobsen reserves the right to modify this information without prior notice. Please note that Everlast Laminate's instructions regarding installation, cleaning and maintenance must be observed. Please refer to Jacobsen.co.nz for guidance. Whilst we have made every effort to ensure the colours and wood characteristics displayed are as accurate as possible these images may vary from the actual product.

**Jacobsen®**

Talk to one of our experts, or visit our website:


0800 800 460 | [customer.services@jacobsen.co.nz](mailto:customer.services@jacobsen.co.nz) | [jacobsen.co.nz](http://jacobsen.co.nz)



## Specifications

Range Name	Everlast Laminate	
Size (W x L)	193 x 1213 x 8 mm	235 x 1525 x 10 mm
Thickness	8 mm	10 mm
M <sup>2</sup> Per Box	2.34	2.506
PCE per CTN	10	7
Locking System	Unilin Click	
Installation	Floating	
Surface	Waterproof	
Grading	AC4	
Bevel	Pressed Bevel	
Environmental	FSC Certified	
Fire Resistance ISO 9239:1:2010	CHF > 11 kW/m <sup>2</sup>	
Emissions	ISO 16000	VOC B
VOC Emissions	California 01350	Compliant

## Construction

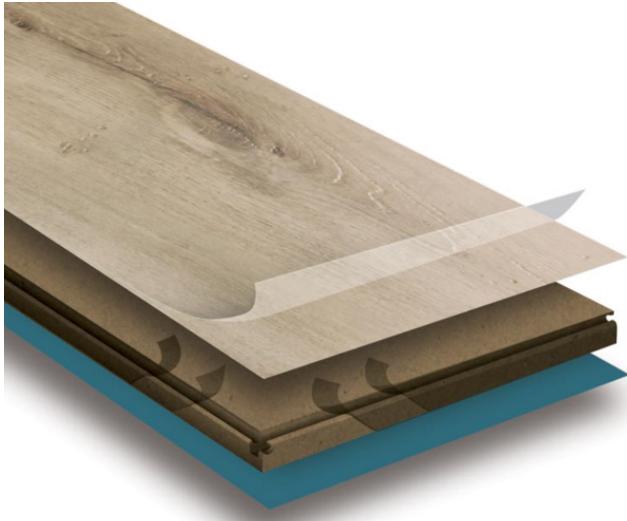

### Commercial Wear Layer

for extra durability, scratch and stain resistance

### Decorative Paper

providing authentic wood look and feel

### High Density Extra Stable Core

35% more stable than standard laminate

### Edge Sealer

protecting the core against moisture and humidity

### Tight Lock Click System

seals out moisture with 5x more contact points than standard laminate

**NOTE:** Silent Shield all-in-one moisture barrier and acoustic underlay is available for Jacobsen Everlast Laminate

## Finishing Trims (available to backorder)



Reducer



Square Nose



T Molding



Stair Nose

# Jacobsen®

Talk to one of our experts, or visit our website:

0800 800 460 | [customer.services@jacobsen.co.nz](mailto:customer.services@jacobsen.co.nz) | [jacobsen.co.nz](http://jacobsen.co.nz)

