

# New Path



**ShawContract®**

Style **Calm 5T493** (Displayed)  
Style **Centered 5T492**  
Style **Positive 5T491**  
Style **Upbeat 5T490**



Focused 90580



Strong 90481



Mysterious 90500




Spontaneous 90505



New Path styles utilize **EcoSolution Q100™** Nylon and are **Low Embodied Carbon + Carbon Neutral** along with being **Cradle to Cradle Certified®** Silver.

Putting people and planet together as they need to be.  
**Learn more at [shawcontract.com](https://www.shawcontract.com)**



Style **Calm 5T493** (Displayed)

Style **Centered 5T492**

Style **Positive 5T491**

Style **Upbeat 5T490**



Bubbly 90100



Satisfied 90111



Delightful 90780



Grateful 90518



Empowered 90555

Style **Upbeat** 5T490




Cheeky 90870




Expressive 90865



Optimistic 90375

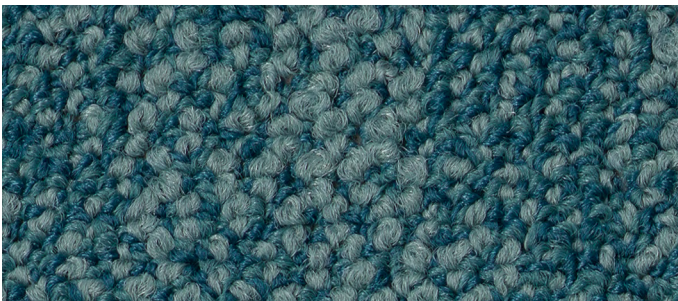

Refreshed 90323

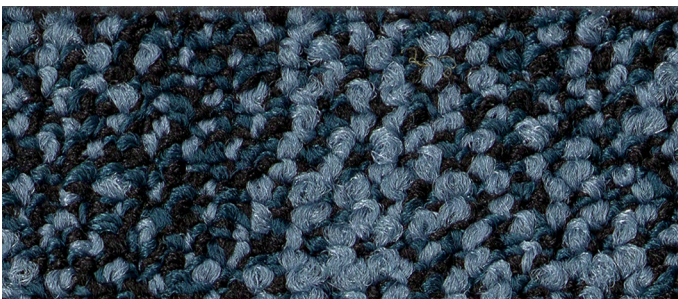

Confident 90486

Style **Centered** 5T492



Cheeky 90870




Expressive 90865




Optimistic 90375



Refreshed 90323

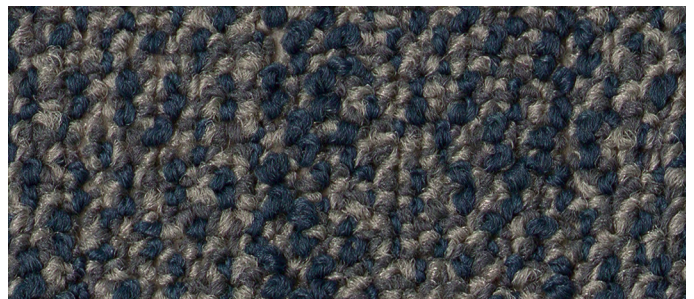

Confident 90486

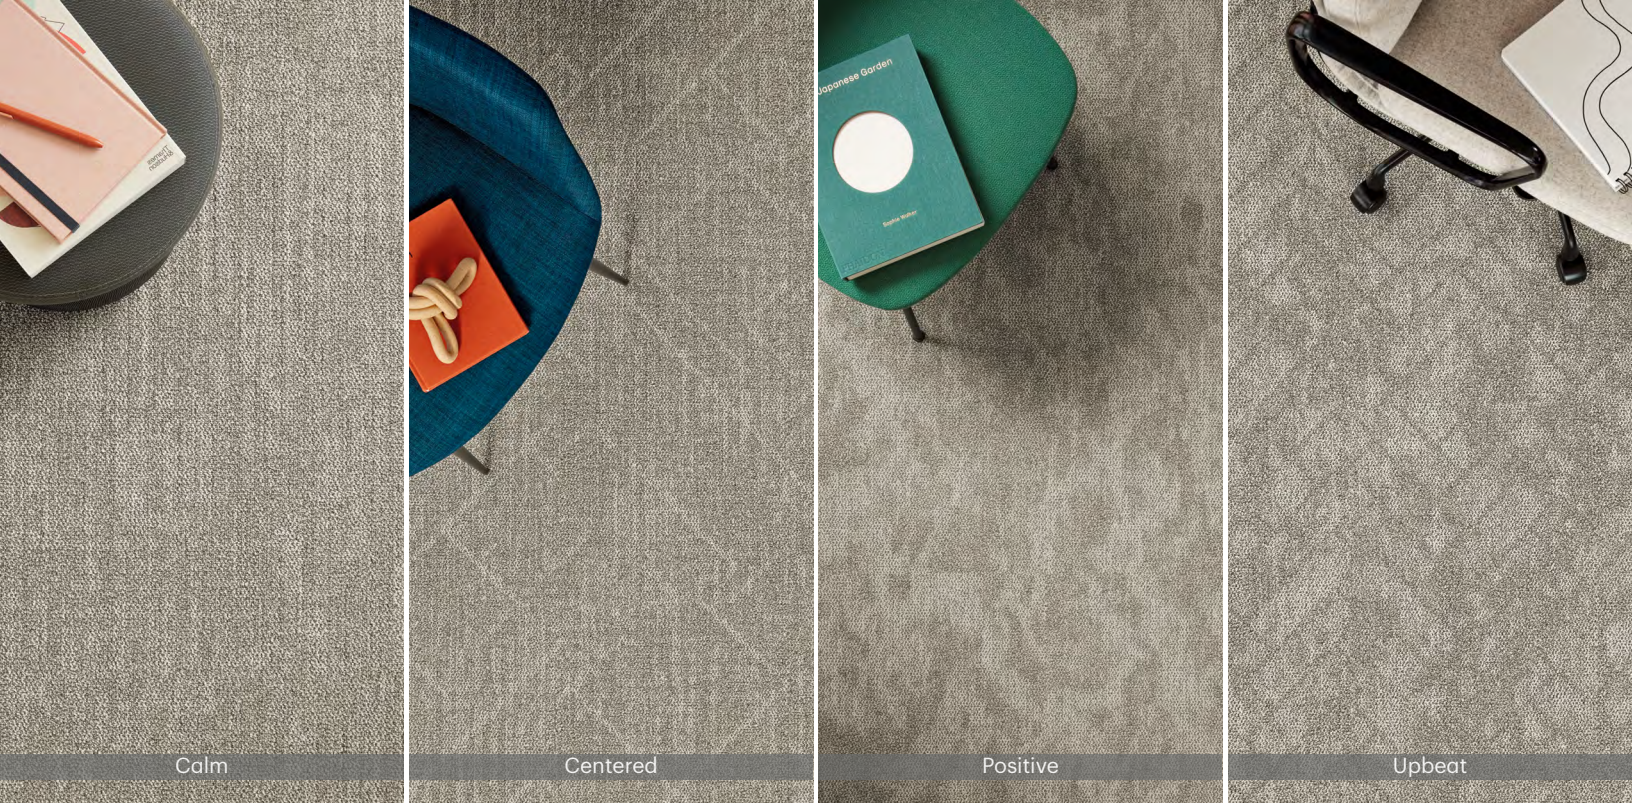

Calm

Centered

Positive

Upbeat


# New Path

## Specifications

Style Name	Calm		Centered		Positive		Upbeat	
Style Number	5T493		5T492		5T491		5T490	
Construction	Multi-level Pattern Loop		Multi-level Pattern Loop		Multi-level Pattern Loop		Multi-level Pattern Loop	
Fiber	EcoSolution Q100™ Nylon		EcoSolution Q100™ Nylon		EcoSolution Q100™ Nylon		EcoSolution Q100™ Nylon	
Dye Method	100% Solution Dyed		100% Solution Dyed		100% Solution Dyed		100% Solution Dyed	
	US Units	Metric Units	US Units	Metric Units	US Units	Metric Units	US Units	Metric Units
Tufted Weight	17.0 oz/yd²	576.4 g/m²	17.0 oz/yd²	576.4 g/m²	17.0 oz/yd²	576.4 g/m²	17.0 oz/yd²	576.4 g/m²
Gauge	1/12	47.2 per 10 cm	1/12	47.2 per 10 cm	1/12	47.2 per 10 cm	1/12	47.2 per 10 cm
Stitches per Inch	8.0	32.5 per 10 cm	8.0	32.5 per 10 cm	8.0	32.5 per 10 cm	8.0	32.5 per 10 cm
Finished Pile Thickness	0.115 in	2.92 mm	0.089 in	2.26 mm	0.107 in	2.72 mm	0.115 in	2.92 mm
Average Density	5,322 oz/yd³	0.197 g/cm³	6,876 oz/yd³	0.254 g/cm³	5,720 oz/yd³	0.212 g/cm³	5,322 oz/yd³	0.197 g/cm³
Kilotex		9.16		9.16		9.16		9.16
Product Size	18 in × 36 in	46 cm × 91 cm	18 in × 36 in	46 cm × 91 cm	18 in × 36 in	46 cm × 91 cm	18 in × 36 in	46 cm × 91 cm
Area Per Carton	63 ft²	5.85 m²	63 ft²	5.85 m²	63 ft²	5.85 m²	63 ft²	5.85 m²
Pieces Per Carton	14 pcs		14 pcs		14 pcs		14 pcs	
Secondary Backing	Strataworx® Tile		Strataworx® Tile		Strataworx® Tile		Strataworx® Tile	
Protective Treatments	SSP® Shaw Soil Protection		SSP® Shaw Soil Protection		SSP® Shaw Soil Protection		SSP® Shaw Soil Protection	
Radiant Panel	(ASTM E 648) Class I		(ASTM E 648) Class I		(ASTM E 648) Class I		(ASTM E 648) Class I	
NBS Smoke	(ASTM E 662) < 450		(ASTM E 662) < 450		(ASTM E 662) < 450		(ASTM E 662) < 450	
Electrostatic Propensity	Less Than 3.5 kV, Built-in		Less Than 3.5 kV, Built-in		Less Than 3.5 kV, Built-in		Less Than 3.5 kV, Built-in	
	Permanent Conductive Fiber		Permanent Conductive Fiber		Permanent Conductive Fiber		Permanent Conductive Fiber	
Cradle to Cradle Certified™	Silver Level (Version 3.1)		Silver Level (Version 3.1)		Silver Level (Version 3.1)		Silver Level (Version 3.1)	
Warranty*	15 Year Commercial Limited		15 Year Commercial Limited		15 Year Commercial Limited		15 Year Commercial Limited	

\*For detailed warranty and the most accurate information on recycled content visit [shawcontract.com](http://shawcontract.com).

### Recommended Installation Methods

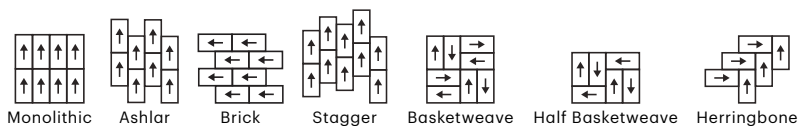

This carpet is manufactured and sold for floor covering use only. Chair pads are recommended under office chairs with roller casters in order to protect appearance retention and to avoid premature wear. Walk off tiles are recommended at building entrances. As with all carpets, colors are subject to dye lot variations. Shading is the result of pile distortion and often is described as "watermarking". This does not constitute a manufacturing defect. To meet warranty requirements, approved adhesives and seam sealers must be used for glue-down application, consult [shawcontract.com](http://shawcontract.com) for more information. This carpet is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another carpet design is also strictly prohibited. Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate specification changes without notice. Visit [shawcontract.com/testing](http://shawcontract.com/testing) for more information.