


Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106 1st Floor, 191 Racecourse Road, Flemington, Victoria 3031 P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400

TEST REPORT

Client : Tarkett Aus	tralia Pty Ltd		Test Number	: :	20-00061	1
Suite 1 Lev	el 3		Issue Date	:	21/05/202	20
3 Columbia	Court		Print Date	:	21/05/202	20
Baulkam Hi	lls NSW 2153					
Sample Description	Clients Ref : "Omnisports Refere	nce Multi-Use"				
	Hetergeneous indoor sport floor cove	ering				
	Colour : Grey					
	End Use : Flooring					
	Nominal Composition : Vinyl					
	Nominal Mass per Unit Area/Density	: 3950g/m2				
	Nominal Thickness : 6.1mm					
9239.1:2010 Part 1	Reaction to Fire Tests for Floorings Radiant Heat Source	5. Determination	of the Burning Be	havi	our using a	
9239.1:2010 Part 1	Reaction to Fire Tests for Floorings	5. Determination	of the Burning Be	havi	our using a	
9239.1:2010 Part 1	Reaction to Fire Tests for Floorings Radiant Heat Source	6. Determination	_	havi	our using a	
9239.1:2010 Part 1	Reaction to Fire Tests for Floorings Radiant Heat Source Date of Sample Arrival	 Determination of the second sec	04/02/2020 21/05/2020	havi	our using a Mean	
9239.1:2010 Part 1	Reaction to Fire Tests for Floorings Radiant Heat Source Date of Sample Arrival Date Tested		04/02/2020 21/05/2020	3	-	kW/m²
9239.1:2010 Part 1	Reaction to Fire Tests for Floorings Radiant Heat Source Date of Sample Arrival Date Tested CHF Value	1	04/02/2020 21/05/2020 2	3	Mean	kW/m²
9239.1:2010 Part 1	Reaction to Fire Tests for Floorings Radiant Heat Source Date of Sample Arrival Date Tested CHF Value Non Directional	1 4.0	04/02/2020 21/05/2020 2	3 0 3	Mean 4.0	kW/m² %.min
9239.1:2010 Part 1	Reaction to Fire Tests for Floorings Radiant Heat Source Date of Sample Arrival Date Tested CHF Value Non Directional Smoke Value	1 4.0 1	04/02/2020 21/05/2020 2 4.1 4. 2	3 0 3	Mean 4.0 Mean	



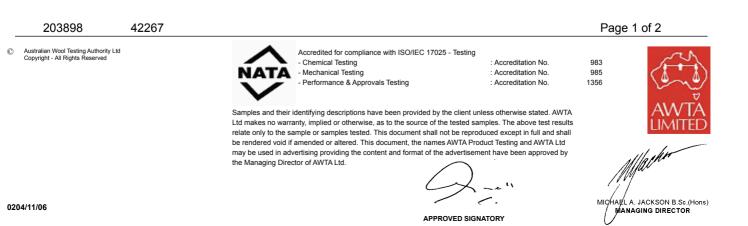

Australian Wool Testing Authority Ltd - trading as AWTA Product Testing A.B.N 43 006 014 106 1st Floor, 191 Racecourse Road, Flemington, Victoria 3031 P.O Box 240, North Melbourne, Victoria 3051 Phone (03) 9371 2400

TEST REPORT

Client :	Tarkett Australia Pty Ltd	Test Number	:	20-000611
	Suite 1 Level 3	Issue Date	:	21/05/2020
	3 Columbia Court	Print Date	:	21/05/2020
	Baulkam Hills NSW 2153			

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test, they are not intended to be sole criterion for assessing the potential fire hazard of the product in use.

Sample was conditioned in accordance with BSEN 13238:2010 at a temperature of 23±2°C and relative humidity of 50±5% for a minimum of 48 hours prior to testing.

Results in accordance with section 9.4 have not been included in the report. They are available upon request.

No directional properties, three specimens tested only.

Each specimen was adhered to a substrate of 6mm thick fibre reinforced cement board using Roberts 656 adhesive and clamped prior to testing.

HF30 not reported as flame out time occurred before 30 minutes.

203898

42267





the Managing Director of AWTA Ltd

Accredited for compliance with ISO/IEC 17025 - Testing - Chemical Testing - Mechanical Testing Performance & Approvals Testing

Ltd makes no warranty, implied or otherwise, as to the source of the tested samples. The above test results relate only to the sample or samples tested. This document shall not be reproduced except in full and shall be rendered void if amended or altered. This document, the names AWTA Product Testing and AWTA Ltd may be used in advertising providing the content and format of the advertisement have been approved by

: Accreditation No Accreditation No · Accreditation No

983 985

1356

Page 2 of 2





APPROVED SIGNATORY