


Strataworx®



- 1. Face Yarn**
Eco Solution Q® fiber provides long-lasting durability and stain protection.
- 2. Primary Backing**
High-strength primary backing is non-woven and adds dimensional stability to the product.
- 3. Performance Precoat**
Performance precoat provides tuft bind.
- 4. Thermoplastic Compound**
Thermoplastic compound laminate bonds the carpet face to the backing for superior delamination strength.
- 5. PET / Fiberglass Composite Reinforcement**
PET / fiberglass reinforcement creates stability.

features / benefits	Lightweight polymer composite backing system engineered for efficiency in manufacturing, transportation, and at the job site . Post Consumer / Post Industrial Content. Innovative lightweight backing for maximum efficiency. Ease of handling, installation, and storage. Alternative to broadloom carpet or PVC carpet tile.
primary	Synthetic
stabilizer	Fiberglass
backing thickness	0.085 inches
dimensions	24" x 24" (standard), optional sizes available
testing	Impact Insulation Class (IIC) rating (ASTM E492-09/E989-06) when paired with the appropriate StrataWorx products, results typically range from 55 –65, depending on subfloor assembly and StrataWorx products. For specific results, please contact your account manager.
environmental	See specific product specifications for environmental information / certifications.
installation	Full Spread 3000,5000,4151, Advantage System, LokDots, LokWorx Tabs
warranty	Carpet Tile 15 Year Commercial Limited Warranty for StrataWorx Carpet Tile 15 Year Commercial Limited Warranty with Stain and Color for StrataWorx

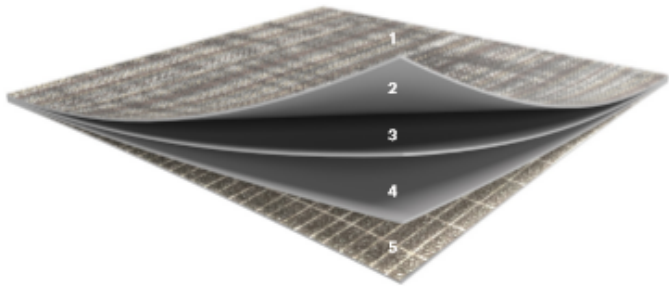