
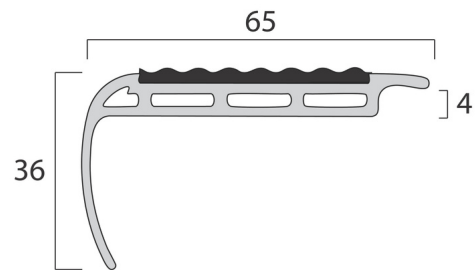


EL165

Carpet Stair Nosing

Image/ Drawing

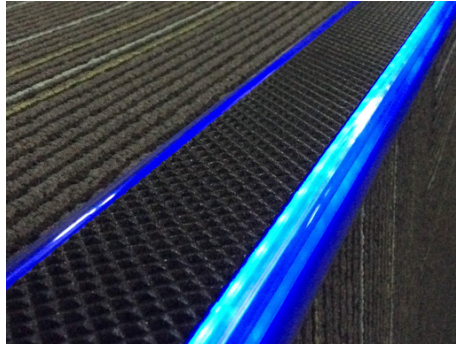

Description

The most compact aesthetic illuminated nosing available. Used extensively in University lecture theatres, restaurants, cinemas and clubs. Surface mounted LEDs available in a variety of colours.

Purpose

We have manufactured this stair nosing product with a built in packer to simplify installation with direct stick carpets. It can also be used in a recessed step or with a packer for higher floor coverings. LED lights illuminate the step edge in dark areas or liven up an ordinary installation.

Material

- Rigid clear PVC. Suitable for interior use only.
- Standard 3.66 Metre Lengths
- Supplied pre drilled for countersunk screw fixing (screws supplied)

Insert

1 x 43mm Tredsafe Diamondtred Insert



EL165

Carpet Stair Nosing

LED Colour Options



Blue



Green



Red



Yellow



Warm White 3000K



Natural White 4000K




Cool White 63000K



Multi-Colour RGB

Installation

The nosings are supplied with the LEDs pre-installed with 200mm wiring at one end. The nosing should be screwed to the step surface (5 screws per metre) once carpet has been installed and when an electrician is present to wire to the power supply. An additional packer can be used for alternative flooring materials. Once the profile is installed, ensure the insert channel is clean from dust, residues and debris. Pre-cut the insert to your required length. Remove the adhesive backing liner. Place the insert into the nosing and press into place without undue stretching. One in place, roll over the insert to ensure consistent adhesion and a secure bond.

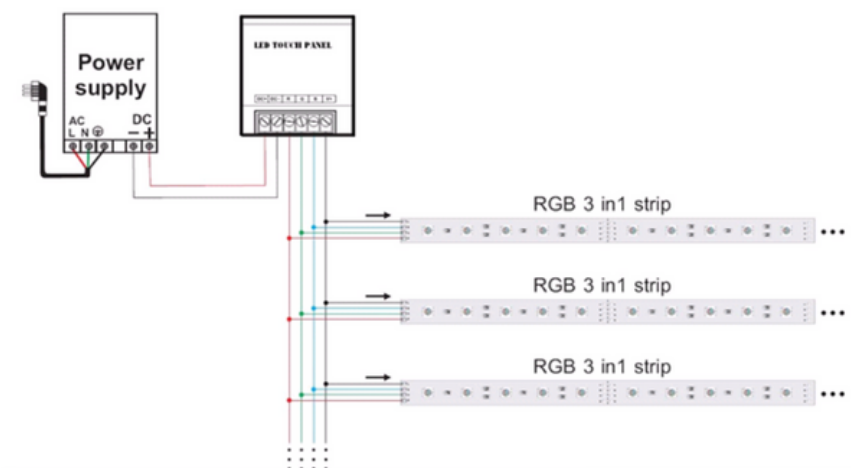

Insert

Special properties

Tredsafe's Diamondtred insert is resistant to attack from ultraviolet light, oil, grease, petrol, salt, dilute acids on alkalis, common household chemicals and detergents. Organic solvents will soften the Diamondtred insert.

Fields of application

Suitable for interior or exterior use

Slip Resistance**AS/NZS 4586 - 2013**

Wet Pendulum – mean 47 – class P4

Dry Floor – mean 0.75 – class D1

Wet/Barefoot ramp – Result 30° – class C

Oil – Wet Ramp – Result 21° – class R11

AS/NZS 3661.1:1993

Dry (tortus): 0.80

Wet (pendulum): 0.44

BS 7976:2002

Pendulum test - dry | PTV average 57

Pendulum test - wet | PTV average 47

DIN 51130:2010

Inclined platform test: R11

Flammability and smoke density**AS1530.3.1982**

Flame Spread = 0 Smoke Dev = 7

AS/ISO 9239.1 2010

Mean Critical Radiant Flux 10.3kw/m²

Mean smoke development rate 85
percentage minutes

Insert

Description		Values
Residual indentation	2.5mm dial guage	Mean 0.05mm
Dimensional stability 80°C 6 hours		0.12%
Moisture movement 23°C 24 hours		0.02%
Elastic property Tensile strength		2.48mj/m3
Heat Ageing 70°C for 15 days	Exudation Colour change	None None
Wear Resistance Taber Abraser	1kg load H18 wheel @ 60rpm	1000 revs 0.6m weight loss

Information given in this data sheet is based on the current state of knowledge. This does not exempt the purchaser from carrying out his own careful inspections of incoming goods and their suitability for local building codes. We reserve the right to make changes to the product data in the course of technical progress or due to operationally related further development. Owing to factors beyond our control during application, recommendations given in this data sheet require tests and experiments by the customer. Our recommendations do not exempt the customer from the obligation to check any infringements of third-party rights himself and eliminate them if necessary. The suggestions for product use are not equivalent to a warranty of its suitability for the recommended purpose.

Each new release of this data sheet supersedes the previous one.

Release: June 2025