iQ Surface



SUSTAINABILITY ATTRIBUTES

Circular Economy and Climate Change







Good Materials





Indoor Air Quality






LCA Information above is based on the product's Environmental Product Declaration (EPD) EPD Number: S-P-01346

EPD comparison should be conducted by experts only

LIFE CYCLE ASSESSMENT

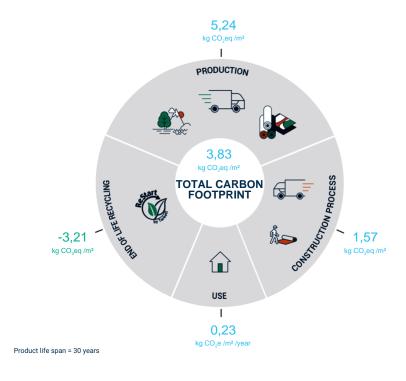



BREEAM INTERNATIONAL NEW CONSTRUCTION 2016



CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
MAN 02 - Life Cycle Cost and Service Life Planning	Encourage the use of life cycle costing No specific requirement at product level	LIFE CYCLE
HEA 01 - Visual Comfort	Best practices in daylighting and artificial lighting design No specific requirement at product level	VISUAL COMFORT
HEA 02 - Indoor Air Quality	TVOC at 28 days ≤ 1000 µg/m3 and Formaldehyde at 28 days ≤ 60 µg/m3	LOW FORMALDENYDE LOW FORMALDENYDE SCORE SCORE STOUGH OPTIMAL INDOOR AIR QUALITY LOW OR COMMANDENY STOUGH STOUG
MAT 01 - Life Cycle Impacts	EPDs available	EPD [®]
MAT 03 - Responsible Sourcing of Construction Products	ISO 14001 certified	ISO 14001
MAT 06 - Material Efficiency	Ingredients verified by a third party or Product composed of recycled content	MHS WIRAL HALTS -STATEMENT 25% RECYCLED CONTENT
WST 01 - Waste Management	Avoid sending waste to landfill No specific requirement at product level	RECYCLABLE Ready





LEED v4.1 Building Design and Construction

CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
MR - Environmental Product Declarations	EPDs available	EPD [®]
MR - Sourcing of Raw Materials	Signatory of the UN Global Compact or Product composed of recycled content or Recyclable at end-of-life or Bio-sourced materials	CIRCULAR 25% RECYCLED CONTENT WE SUPPORT
MR - Material Ingredients	Ingredients verified by a third party or- Cradle to Cradle® certification at bronze level or higher	SALIEM. MALIF. MINIST
MR - Construction and Demolition Waste Management	Avoid sending waste to landfill No specific requirement at product level	RECYCLABLE Ready
EQ - Low Emitting Materials and Indoor Air Quality Assessment	TVOC at 28 days ≤ 1000 µg/m3 and Formaldehyde at 28 days ≤ 10 µg/m3 Decrease the concentration of particles in the air	LOW FORMALDEHYDE SCORE SCORE STORE STORE
EQ - Interior Lighting and Daylight	Best practices in daylighting and artificial lighting design No specific requirement at product level	VISUAL COMFORT





WELL BUILDING STANDARD v2

CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
L02 - Visual Lighting Design and L 06 - Daylight Simulation	Best practices in daylighthing andartificial lighting design No specific requirement at product level	VISUAL COMFORT
X01, X02 and X05 - Material Restrictions, Interior Hazardous Materials Management and Enhanced Material Restrictions	Asbestos < 1000 ppm Halogenated flame retardants < 100 ppm PFAS < 100 ppm Lead < 100 ppm Cadmium < 100 ppm Mercury < 100 ppm Orthophthalates < 100 ppm Higher amounts are allowed if required by local code	Verify compliance according to chemicals displayed in MHS. Evaluation threshold at least 100 ppm (0.01%) of the final product.
X06 - VOC Restrictions	TVOC at 28 days ≤ 1000 µg/m3 and Formaldehyde at 28 days ≤ 124 µg/m3 (E1)	LOW FORMALDEHYDE SCORE STORE S
X07 - Materials Transparency	Ingredients verified by a third party or Cradle to Cradle® certification at bronze level or higher	MITTAL STATES OF THE STATES OF
X08 - Materials Optimization	Ingredients verified by a third party or Cradle to Cradle® certification at silver level or higher	MITTELL RALES STATEMENT

01/4		
CK V	rati	ına'
SKA	แดน	ши

CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
Recycled content > 50% or Renewable or natural content > 50% or Cradle to Cradle® certification at silver level or higher or EPDs available	EPD [®]
Avoid sending waste to landfill No specific requirement at product level	RECYCLABLE Ready
TVOC at 28 days ≤ 100 µg/m3 and Formaldehyde at 28 days ≤ 10 µg/m3 or Ingredient disclosure	LOW FORMALDEHYDE EMISSIONS VOC STORAGE OPTIMAL INDOOR AIR QUALITY AIR QUALITY
Best practices in daylighting design No specific requirement at product level	VISUAL COMFORT
	Recycled content > 50% or Renewable or natural content > 50% or Cradle to Cradle® certification at silver level or higher or EPDs available Avoid sending waste to landfill No specific requirement at product level TVOC at 28 days ≤ 100 µg/m3 and Formaldehyde at 28 days ≤ 10 µg/m3 or Ingredient disclosure





DGNB System - New buildings Version 2020 International

CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
ENV1.1 - Building Life Cycle Assessment	EPDs available	EPD [®]
ENV1.2 - Local Environment Impact	Textile flooring - Quality level 4 TVOC at 28 days ≤ 100 μg/m3 SVHC < 0,1% Biocidal products only in accordance with 528/2012/EC Resilient flooring - Quality level 4 TVOC at 28 days ≤ 300 μg/m3 SVHC < 0,1% Chlorinated paraffins < 0,1% Phthalates that are toxic to reproduction < 0,1% No use of lead and cadmium compounds	Verify compliance according to chemicals displayed in MHS. Evaluation threshold at least 100 ppm (0.01%) of the final product. Manufacturer declaration may also be provided - contact TARKETT's sales representative.
ENV1.3 - Sustainable Resource Extraction	Product composed of open-loop or post-consumer recycled content	25% RECYCLED CONTENT
ENV2.2 - Potable Water Demand and Waste Water Volume	Encourage the reduction of potable water demand No specific requirement at product level	WATER CONSUMPTION
ECO1.1 - Life Cycle Cost	Encourage the use of life cycle costing No specific requirement at product level	LIFE CYCLE
SOC1.2 - Indoor Air Quality	Indoor air quality measurement after construction work No specific requirement at product level	<0 voc <0 upum² <0 upum
SOC1.4 - Visual Comfort	Best practices in daylighting and artificial lighting design No specific requirement at product level	VISUAL COMFORT
TEC1.5 - Ease of Cleaning Building Components	Verifiable results in reduced life cycle costs for cleaning No specific requirement at product level	EASY CLEANING AND MAINTENANCE LIFE CYCLE
TEC1.6 - Ease of Recovering and Recycling	Efficient use of resources	RECYCLABLE Ready





HQE BÂTIMENT DURABLE v4

CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
Qualité de l'air intérieur	Mesure de polluants dans l'air après travaux	CONTRACT CO
Confort Visuel	Bonnes pratiques sur l'éclairage naturel et artificiel Pas d'exigence spécifique au niveau des produits	VISUAL COMFORT
Eau	Limiter la consommation d'eau potable Pas d'exigence spécifique au niveau des produits	WATER CONSUMPTION
Déchets	Enviter l'envoi à la décharge Pas d'exigence spécifique au niveau des produits	RECYCLABLE Ready
ACV	Calcul des impacts envrionnementaux de l'opération selon la RE2020	FDES files hies
Maitrise des coûts	Encourager l'utilisation d'une analyse en coût global Pas d'exigence spécifique au niveau des produits	LIFECYCLE
Economie locale	Composant issu d'une filière de valorisation matière des déchets	25% RECYCLED CONTENT



Green Star - Interiors v1.3



CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
Indoor Pollutants	TVOC at 28 days ≤ 1000 µg/m3 and Formaldehyde at 28 days ≤ 10 µg/m3	CONTINUE INDOOR LOW FORMALDEHYDE EMISSIONS CONTINUE INDOOR AIR QUALITY
Lighting and Visual Comfort	Best practices in daylighting and artificial lighting design No specific requirement at product level	VISUAL COMFORT
Life Cycle Assessment	EPDs available	<u>EPD</u> °
Responsible Building Materials	Responsibly sourced materials, including best practice guidelines for PVC	O CONTROL OF THE PROPERTY OF T
Construction and Demolition Waste	Avoid sending waste to landfill No specific requirement at product level	RECYCLABLE Ready



MILJÖBYGGNAD		BYGGNAD CETITIERAD I SVERIGE
CERTIFICATION CRITERIA	CERTIFICATION REQUIREMENTS	THE TARKETT RESPONSE
Indicator 13 (V3.0 & 3.1) Indicator 15 (V4.0)	Composition declared according to CLP/REACH None classified compounds are publicly declared if they make up >2% of composition	See available eBVD for Swedish adaptation.
Indicator 14 (V3.0 & 3.1) Indicator 9 (V4.0)	Hazardous classified below CLP guidelines TVOC at 28 days ≤ 1000 µg/m3 Formaldehyde at 28 days ≤ 10 µg/m3	LOW FORMALDEHYDE LOW FORMALDEHYDE OPTIMAL INDOOR AIR QUALITY See available eBVD for Swedish adaptation.
Indicator 13 (V4.0)	At least 20% recycled content	25% RECYCLED CONTENT



